

Product datasheet:

AGRO cable glands Progress® nickel-plated brass increased safety Ex e II for installation of multiple cables

Short entry thread Pg

Approval type: Progress MS Multi EX

- One-piece sealing insert
- not overall length insulated
- 3 = Material sealing insert NBR
- Suitable locking pins see accessories
- Executions in steel A2 and A4, entry thread NPT



Article number: **EX1310.21.4.070**

EAN: 7611614239491

Packaging quantity: 25

Price group: 530

Dimensions / Form


Thread: Pg 21

Product length: 7 mm

Spanner size: 30 mm

Dimension H: 28 mm

Dimension L: 7 mm

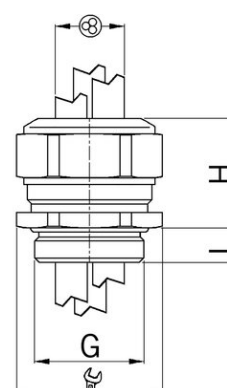

Connections / Entries

Min. clamping range: 5.5 mm

Max. clamping range: 7 mm

clamp technology: Compression technology

Features

Thread type: Pg

Thread length: short

Approvals / Certifications

Protection class: IP66

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex eb IIC Gb

Dust: II 2D Ex tb IIIC Db

Test standard: IEC EN 60079-7

IECEx certification: IECEx SEV 15.0019X

Further certifications: SEV 15 ATEX 0152X

Connectivity certification: SEV 15 ATEX 0152X



Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	100 °C