

Product datasheet:

AGRO cable glands Progress® nickel-plated brass increased safety Ex e II for installation of multiple cables

Short entry thread Pg

Approval type: Progress MS Multi EX


- One-piece sealing insert
- not overall length insulated
- 3 = Material sealing insert NBR
- Suitable locking pins see accessories
- Executions in steel A2 and A4, entry thread NPT



Article number:	EX1310.29.6.065
EAN:	7611614240787
Packaging quantity:	25
Price group:	530

Dimensions / Form

Thread:	Pg 29
Product length:	8 mm
Spanner size:	38 mm
Dimension H:	28 mm
Dimension L:	8 mm

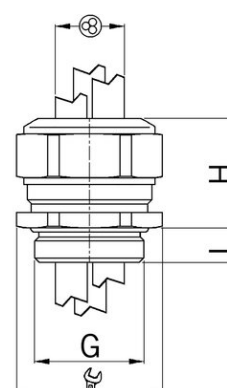

Connections / Entries

Min. clamping range:	5.5 mm
Max. clamping range:	6.5 mm
clamp technology:	Compression technology

Features

Thread type:	Pg
Thread length:	short

Approvals / Certifications

Protection class:	IP66
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0019X
Further certifications:	SEV 15 ATEX 0152X
Connectivity certification:	SEV 15 ATEX 0152X



Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	100 °C