

Product datasheet:

AGRO cable glands Progress® nickel-plated brass with clamps increased safety Ex e II

Short entry thread Pg

Approval type: Progress MS KB EX

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- Long entry thread
- Executions in steel A2 and A4



Article number: EX1803.21

EAN: 7611614176987

Packaging quantity: 25

Dimensions / Form

Thread:	Pg 21
Spanner size:	30 mm
Dimension H:	35 mm
Thread length L:	7.5 mm

Connections / Entries


Min. clamping range:	16 mm
Max. clamping range:	20.5 mm
Clamping range with inlet min.:	12.5 mm
Clamping range with inlet max.:	16 mm
clamp technology:	Compression technology

Features

Thread type:	Pg
Thread length:	short

Approvals / Certifications

Protection class:	IP66
Protection class with condition:	IP 66 - IP 68 (10 bar)
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0018

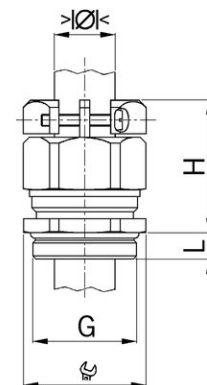

Assembly instructions



Certificates



Planning data

Product datasheet:

Further certifications:	SEV 15 ATEX 0151
-------------------------	------------------

Connectivity certification:	SEV 15 ATEX 0151
-----------------------------	------------------

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
--------------------------------	--------

Maximum operating temperature:	100 °C
--------------------------------	--------