

## Product datasheet:

# AGRO cable glands Progress® nickel-plated brass with clamps increased safety Ex e II

## Short entry thread Pg

### Approval type: Progress MS KB EX

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- Long entry thread
- Executions in steel A2 and A4



**Article number:** EX1803.36

**EAN:** 7611614177045

**Packaging quantity:** 10

### Dimensions / Form

|                  |       |
|------------------|-------|
| Thread:          | Pg 36 |
| Spanner size:    | 50 mm |
| Dimension H:     | 47 mm |
| Thread length L: | 8 mm  |

### Connections / Entries


|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 30.5 mm                |
| Max. clamping range:            | 35 mm                  |
| Clamping range with inlet min.: | 26 mm                  |
| Clamping range with inlet max.: | 30.5 mm                |
| clamp technology:               | Compression technology |

### Features

|                |       |
|----------------|-------|
| Thread type:   | Pg    |
| Thread length: | short |

### Approvals / Certifications

|                                  |                              |
|----------------------------------|------------------------------|
| Protection class:                | IP66                         |
| Protection class with condition: | IP 66 - IP 68 (10 bar)       |
| Explosion-proof design:          | Yes                          |
| EX zone:                         | Gas 1 and 2 - Dust 21 and 22 |
| Gas:                             | II 2G Ex eb IIC Gb           |
| Dust:                            | II 2D Ex tb IIIC Db          |
| Test standard:                   | IEC EN 60079-7               |
| IECEx certification:             | IECEx SEV 15.0018            |

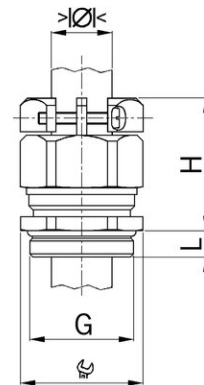

Assembly instructions



Certificates



Planning data

## Product datasheet:

|                         |                  |
|-------------------------|------------------|
| Further certifications: | SEV 15 ATEX 0151 |
|-------------------------|------------------|

|                             |                  |
|-----------------------------|------------------|
| Connectivity certification: | SEV 15 ATEX 0151 |
|-----------------------------|------------------|

---

**Storage / Installation / Operation**

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
|--------------------------------|--------|

|                                |        |
|--------------------------------|--------|
| Maximum operating temperature: | 100 °C |
|--------------------------------|--------|