Product datasheet:

AGRO EMC cable glands Progress® nickel-plated brass with contact sleeve and clamps increased saftey Ex e II

Short entry thread metric

Approval type: Progress MS EMC KB EX

· One-piece sealing insert
· not overall length insulated
· 1 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X_x000D_
· Long entry thread available on request

Article number:	**EX1803.80.12.060**
E-No:	121392308
EAN:	7611614176550
Packaging quantity:	50

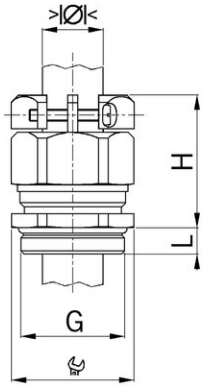

Dimensions / Form	
Thread:	M12x1.5
Spanner size:	15/16 mm
Dimension H:	26 mm
Thread length L:	5 mm

Connections / Entries	
Min. clamping range:	4.5 mm
Max. clamping range:	6 mm
clamp technology:	Compression technology
Contact:	Contact sleeve

Features	
Thread type:	metric
Thread length:	short

Approvals / Certifications	
Protection class:	IP66
Protection class with condition:	IP 66 - IP 68 (10 bar)
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0018
Further certifications:	SEV 15 ATEX 0151
Connectivity certification:	SEV 15 ATEX 0151

Assembly instructions

Certificates

Planning data

Product datasheet:

Storage / Installation / Operation	
Minimum operating temperature:	-60 °C
Maximum operating temperature:	100 °C