

Product datasheet:

AGRO cable glands Progress® EMC easyCONNECT with clamps increased safety Ex e II

Short entry thread metric

Approval type: Progress MS EMV easyCONNECT KB EX

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- Entry thread Pg and NPT
- Executions in steel A2 and A4



Article number: EX1803.83.25

E-No: 121392548

EAN: 7611614326573

Packaging quantity: 25


Dimensions / Form

Thread: M25x1.5

Spanner size: 30 mm

Dimension H: 40 mm

Thread length L: 7 mm

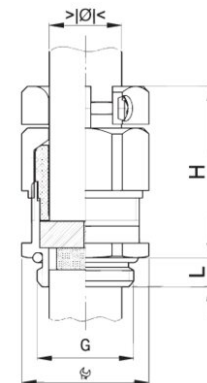

Connections / Entries

Min. clamping range: 16 mm

Max. clamping range: 20.5 mm

Clamping range with inlet min.: 12.5 mm

Clamping range with inlet max.: 16 mm

clamp technology: Compression technology

Contact: Contact sleeve

Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP66

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex eb IIC Gb

Dust: II 2D Ex tb IIIC Db

Test standard: IEC EN 60079-7



Assembly instructions



Certificates



Planning data

Product datasheet:

IECEX certification:	IECEX SEV 15.0018
Further certifications:	SEV 15 ATEX 0151
Connectivity certification:	SEV 15 ATEX 0151

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	100 °C