

Product datasheet:

AGRO combination conduit glands Progress® nickel-plated brass increased saftey Ex e II

AGRO combination conduit glands Progress® nickel-plated brass increased saftey Ex e II

Approval type: Progress MS Kombi EX

- One-piece sealing insert
- not overall length insulated
- Long entry thread available on request
- Depending on the type of conduit, the stabilising bush must be ordered separately.
- Warning: Only metallic conduits or conduits with metallic braiding may be applied !



Article number: EX1700.12.10.065

EAN: 7611614252797

Packaging quantity: 50

Price group: 530


Dimensions / Form

Thread: M12x1.5

Spanner size: 15/17 mm

Dimension H: 33 mm

Thread length L: 5 mm

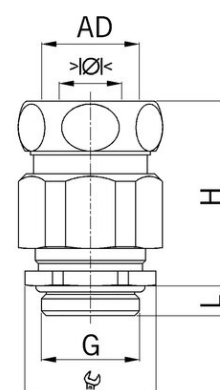

Connections / Entries

Min. clamping range: 4 mm

Max. clamping range: 6.5 mm

clamp technology: Compression technology



Features

Thread type: metric

Thread length: short

Approvals / Certifications

Protection class: IP66

Explosion-proof design: Yes

EX zone: Gas 1 and 2 - Dust 21 and 22

Gas: II 2G Ex eb IIC Gb

Dust: II 2D Ex tb IIIC Db

Test standard: IEC EN 60079-7

IECEx certification: IECEx SEV 15.0019X

Further certifications: SEV 15 ATEX 0152X

Connectivity certification: SEV 15 ATEX 0152X



Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	100 °C