

Product datasheet:

AGRO combination conduit glands Progress® nickel-plated brass increased saftey Ex e II

AGRO combination conduit glands Progress® nickel-plated brass increased saftey Ex e II

Approval type: Progress MS Kombi EX

- One-piece sealing insert
- not overall length insulated
- Long entry thread available on request
- Depending on the type of conduit, the stabilising bush must be ordered separately.
- Warning: Only metallic conduits or conduits with metallic braiding may be applied !



Article number:	⇒ EX1700.25.21.125
EAN:	7611614252919
Packaging quantity:	25
Price group:	530

Dimensions / Form

Thread:	M25x1.5
Spanner size:	30/29 mm
Dimension H:	43 mm
Thread length L:	7 mm

Connections / Entries


Min. clamping range:	10.5 mm
Max. clamping range:	12.5 mm
clamp technology:	Compression technology

Features

Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP66
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0019X
Further certifications:	SEV 15 ATEX 0152X
Connectivity certification:	SEV 15 ATEX 0152X

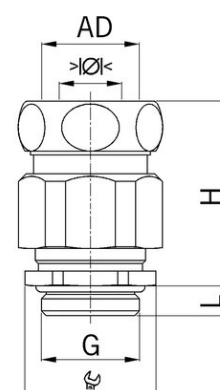

Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-60 °C
Maximum operating temperature:	100 °C