Product datasheet:

AGRO synthetic cable glands Progress® GFK increased safety Ex e II

Entry thread metric

Approval type: Progress GFK EX


· Light grey RAL 7035
· One-piece sealing insert
· 3 = Material sealing insert NBR



Article number:	**EX1571.63.480**
E-No:	121760968
EAN:	7611614176185
Packaging quantity:	5

Dimensions / Form

Thread:	M63x1.5
Spanner size:	75 mm
Dimension H:	48 mm
Thread length L:	16 mm

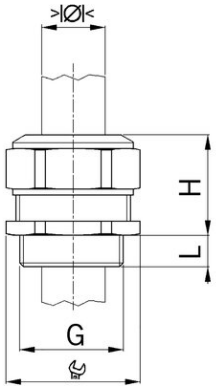

Connections / Entries

Min. clamping range:	46 mm
Max. clamping range:	48 mm
clamp technology:	Compression technology

Features

Properties:	halogen-free
Thread type:	metric

Material / Colour

Material:	Polyamide glass fibre reinforced

Approvals / Certifications

Protection class:	IP68, IP66
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-0, IEC EN 60079-31, IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0019X
Further certifications:	SEV 15 ATEX 0152X
Connectivity certification:	SEV 15 ATEX 0152X

Assembly instructions

Certificates

Planning data

Product datasheet:

Storage / Installation / Operation	
Minimum operating temperature:	-20 °C
Maximum operating temperature:	85 °C