

Product datasheet:

AGRO synthetic cable glands Progress® GFK for increased safety Ex e II with sealing insert for multiple cables

Entry thread metric

Approval type: Progress GFK Multi EX

- Light grey RAL 7035
- One-piece sealing insert
- 3 = Material sealing insert NBR
- Suitable locking pins see accessories



Article number:	EX1571.32.4.090
EAN:	7611614239620
Packaging quantity:	25

Dimensions / Form

Thread:	M32x1.5
Product length:	15 mm
Spanner size:	41 mm
Dimension H:	35 mm
Dimension L:	15 mm

Connections / Entries


Min. clamping range:	7.5 mm
Max. clamping range:	9 mm
clamp technology:	Compression technology

Features

Properties:	halogen-free
Thread type:	metric

Approvals / Certifications

Protection class:	IP66
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2GD Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0019X
Further certifications:	SEV 15 ATEX 0152X
Connectivity certification:	SEV 15 ATEX 0152X

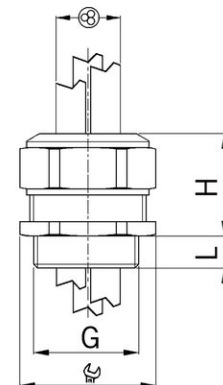

Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-20 °C
Maximum operating temperature:	85 °C