

## Product datasheet:

# AGRO synthetic cable glands Progress® GFK for increased safety Ex e II with sealing insert for multiple cables

## Entry thread metric

### Approval type: Progress GFK Multi EX

- Black RAL 9005
- One-piece sealing insert
- 3 = Material sealing insert NBR
- Suitable locking pins see accessories



**Article number:** **EX1540.40.7.090**

**EAN:** 7611614239774

**Packaging quantity:** 10

**Price group:** 530

### Dimensions / Form


**Thread:** M40x1.5

**Product length:** 15 mm

**Spanner size:** 50 mm

**Dimension H:** 40 mm

**Dimension L:** 15 mm

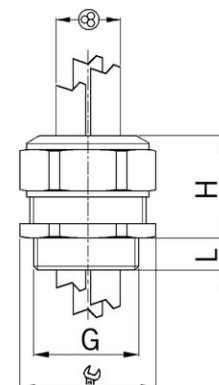

### Connections / Entries

**Min. clamping range:** 8 mm

**Max. clamping range:** 9 mm

**clamp technology:** Compression technology

### Features

**Properties:** halogen-free

**Thread type:** metric

### Approvals / Certifications

**Protection class:** IP66

**Explosion-proof design:** Yes

**EX zone:** Gas 1 and 2 - Dust 21 and 22

**Gas:** II 2G Ex eb IIC Gb

**Dust:** II 2D Ex tb IIIC Db

**Test standard:** IEC EN 60079-7

**IECEx certification:** IECEx SEV 15.0019X

**Further certifications:** SEV 15 ATEX 0152X

**Connectivity certification:** SEV 15 ATEX 0152X



Assembly instructions



Certificates



Planning data

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -20 °C |
| Maximum operating temperature: | 85 °C  |