

## Product datasheet:

# AGRO synthetic cable glands Progress® GFK for increased safety Ex e II with sealing insert for multiple cables

## Entry thread Pg

### Approval type: Progress GFK Multi EX

- Light grey RAL 7035
- One-piece sealing insert
- 3 = Material sealing insert NBR



**Article number:** **EX1571.29.3.090**

**EAN:** 7611614239897

**Packaging quantity:** 25

**Price group:** 530

### Dimensions / Form

**Thread:** Pg 29

**Product length:** 13 mm

**Spanner size:** 41 mm

**Dimension H:** 36 mm

**Dimension L:** 13 mm

### Connections / Entries

**Min. clamping range:** 8 mm

**Max. clamping range:** 9 mm

**clamp technology:** Compression technology

### Features

**Properties:** halogen-free

**Thread type:** Pg

### Approvals / Certifications

**Protection class:** IP66

**Explosion-proof design:** Yes

**EX zone:** Gas 1 and 2 - Dust 21 and 22

**Gas:** II 2G Ex eb IIC Gb


**Dust:** II 2D Ex tb IIIC Db

**Test standard:** IEC EN 60079-7

**IECEx certification:** IECEx SEV 15.0019X

**Further certifications:** SEV 15 ATEX 0152X

**Connectivity certification:** SEV 15 ATEX 0152X

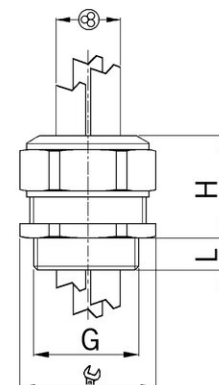

Assembly instructions



Certificates



Planning data

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -20 °C |
| Maximum operating temperature: | 85 °C  |