

Product datasheet:

AGRO synthetic cable glands Progress® GFK increased safety Ex e II and intrinsic safety Ex i II

Entry thread metric

Approval type: Progress GFK EX

- Black / light blue RAL 5012
- One-piece sealing insert
- 3 = Material sealing insert NBR
- For installation of multiple cables



Article number: EX1530.25.160

EAN: 7611614176734

Packaging quantity: 25

Price group: 530

Dimensions / Form

Thread: M25x1.5

Spanner size: 34 mm

Dimension H: 33 mm

Thread length L: 13 mm

Connections / Entries

Min. clamping range: 12.5 mm

Max. clamping range: 16 mm

clamp technology: Compression technology

Features

Properties: halogen-free

Thread type: metric

Approvals / Certifications

Protection class: IP66

Explosion-proof design: Yes

EX zone: Gas 0- 1 and 2 - Dust 20- 21 and 22

Gas: II 2G Ex ia IIC Ga


Dust: II 2D Ex ia IIIC CE

Test standard: IEC EN 60079-7

IECEx certification: IECEx SEV 15.0019X

Further certifications: SEV 15 ATEX 0152X

Connectivity certification: SEV 15 ATEX 0152X

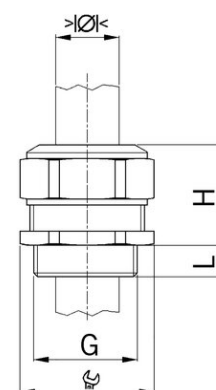

Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-20 °C
Maximum operating temperature:	85 °C