

## Product datasheet:

# AGRO synthetic cable glands Progress® GFK increased safety Ex e II and intrinsic safety Ex i II

## Entry thread metric

### Approval type: Progress GFK EX

- Black / light blue RAL 5012
- One-piece sealing insert
- 3 = Material sealing insert NBR
- For installation of multiple cables



|                        |                      |
|------------------------|----------------------|
| <b>Article number:</b> | <b>EX1530.25.125</b> |
| E-No:                  | 121765608            |
| EAN:                   | 7611614176727        |
| Packaging quantity:    | 25                   |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M25x1.5 |
| Spanner size:    | 34 mm   |
| Dimension H:     | 33 mm   |
| Thread length L: | 13 mm   |

### Connections / Entries


|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 9.5 mm                 |
| Max. clamping range: | 12.5 mm                |
| clamp technology:    | Compression technology |

### Features

|              |              |
|--------------|--------------|
| Properties:  | halogen-free |
| Thread type: | metric       |

### Approvals / Certifications

|                             |                                     |
|-----------------------------|-------------------------------------|
| Protection class:           | IP66                                |
| Explosion-proof design:     | Yes                                 |
| EX zone:                    | Gas 0- 1 and 2 - Dust 20- 21 and 22 |
| Gas:                        | II 2G Ex ia IIC Ga                  |
| Dust:                       | II 2D Ex ia IIIC CE                 |
| Test standard:              | IEC EN 60079-7                      |
| IECEx certification:        | IECEx SEV 15.0019X                  |
| Further certifications:     | SEV 15 ATEX 0152X                   |
| Connectivity certification: | SEV 15 ATEX 0152X                   |

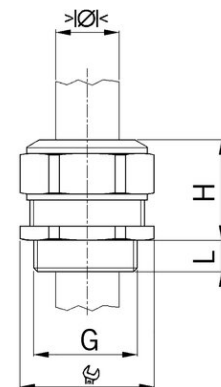

Assembly instructions



Certificates



Planning data

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -20 °C |
| Maximum operating temperature: | 85 °C  |