

Product datasheet:

AGRO synthetic cable glands Progress® GFK increased safety Ex e II and intrinsic safety Ex i II

Entry thread metric

Approval type: Progress GFK EX

- Black / light blue RAL 5012
- One-piece sealing insert
- 3 = Material sealing insert NBR
- For installation of multiple cables



Article number:	EX1530.40.300
E-No:	121765828
EAN:	7611614176840
Packaging quantity:	10

Dimensions / Form

Thread:	M40x1.5
Spanner size:	50 mm
Dimension H:	40 mm
Thread length L:	15 mm

Connections / Entries


Min. clamping range:	28.5 mm
Max. clamping range:	30 mm
clamp technology:	Compression technology

Features

Properties:	halogen-free
Thread type:	metric

Approvals / Certifications

Protection class:	IP66
Explosion-proof design:	Yes
EX zone:	Gas 0- 1 and 2 - Dust 20- 21 and 22
Gas:	II 2G Ex ia IIC Ga
Dust:	II 2D Ex ia IIIC CE
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0019X
Further certifications:	SEV 15 ATEX 0152X
Connectivity certification:	SEV 15 ATEX 0152X

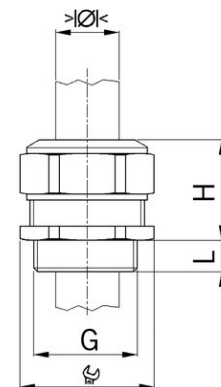

Assembly instructions



Certificates



Planning data

Product datasheet:

Storage / Installation / Operation

Minimum operating temperature:	-20 °C
Maximum operating temperature:	85 °C