

## Product datasheet:

# AGRO synthetic cable glands Progress® GFK increased safety Ex e II and intrinsic safety Ex i II

## Entry thread metric

### Approval type: Progress GFK EX

- Black / light blue RAL 5012
- One-piece sealing insert
- 3 = Material sealing insert NBR
- For installation of multiple cables



**Article number:** EX1530.50.390

**EAN:** 7611614176949

**Packaging quantity:** 10

**Price group:** 530

### Dimensions / Form

**Thread:** M50x1.5

**Spanner size:** 60 mm

**Dimension H:** 42 mm

**Thread length L:** 16 mm

### Connections / Entries

**Min. clamping range:** 37 mm

**Max. clamping range:** 39 mm

**clamp technology:** Compression technology

### Features

**Properties:** halogen-free

**Thread type:** metric

### Approvals / Certifications

**Protection class:** IP66

**Explosion-proof design:** Yes

**EX zone:** Gas 0- 1 and 2 - Dust 20- 21 and 22

**Gas:** II 2G Ex ia IIC Ga


**Dust:** II 2D Ex ia IIIC CE

**Test standard:** IEC EN 60079-7

**IECEx certification:** IECEx SEV 15.0019X

**Further certifications:** SEV 15 ATEX 0152X

**Connectivity certification:** SEV 15 ATEX 0152X

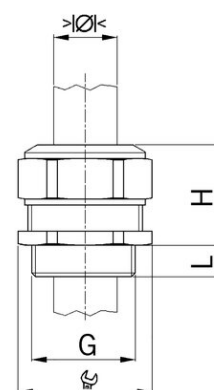

Assembly instructions



Certificates



Planning data

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -20 °C |
| Maximum operating temperature: | 85 °C  |