

Product datasheet:

Reduction fittings nickel-plated brass increased safety Ex e II

Outer thread metric or Pg

Approval type: Reduktion MS EX

- Outer thread metric
- Inner thread metric
- with O-ring
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- The norm interdicts to screw several reduction/enlarging fittings into each other!



Article number: **EX3500.12.08**


E-No: 126340308

EAN: 7611614175331

Packaging quantity: 50

Dimensions / Form

Product length:	5 mm
Spanner size:	15 mm
Dimension H:	3.0 mm
Dimension L:	5 mm
External thread:	M12x1.5
Internal thread:	M 8x1.25

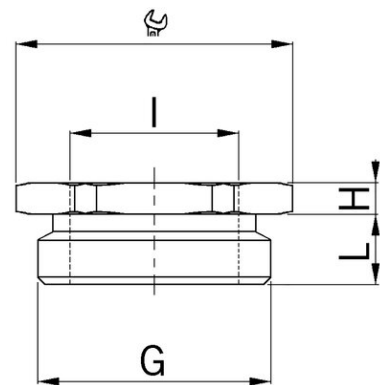

Connections / Entries

clamp technology: Compression technology

Features

Product type: reduction

Approvals / Certifications

Protection class:	IP66
Explosion-proof design:	Yes
EX zone:	Gas 1 and 2 - Dust 21 and 22
Gas:	II 2G Ex eb IIC Gb
Dust:	II 2D Ex tb IIIC Db
Test standard:	IEC EN 60079-7
IECEx certification:	IECEx SEV 15.0018
Further certifications:	SEV 15 ATEX 0151
Connectivity certification:	SEV 15 ATEX 0151

Storage / Installation / Operation

Minimum operating temperature: -60 °C



Assembly instructions



Certificates



Planning data

Product datasheet:

Maximum operating temperature:

100 °C
