

## Product datasheet:

# Enlarging fittings nickel-plated brass increased safety Ex e II

## Outer thread metric or Pg

### Approval type: Erweiterung MS EX

- Outer thread Pg
- Inner thread metric
- with O-ring
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- The norm interdicts to screw several reduction/enlarging fittings into each other!



**Article number:** EX3600.07.17

**EAN:** 7611614174969

**Packaging quantity:** 50

### Dimensions / Form

|                  |         |
|------------------|---------|
| Product length:  | 6 mm    |
| Spanner size:    | 18 mm   |
| Dimension H:     | 9.0 mm  |
| Dimension L:     | 6 mm    |
| External thread: | Pg 7    |
| Internal thread: | M16x1.5 |

### Connections / Entries

**clamp technology:** Compression technology

### Features


**Product type:** expansion

### Approvals / Certifications

|                             |                              |
|-----------------------------|------------------------------|
| Protection class:           | IP66                         |
| Explosion-proof design:     | Yes                          |
| EX zone:                    | Gas 1 and 2 - Dust 21 and 22 |
| Gas:                        | II 2G Ex eb IIC Gb           |
| Dust:                       | II 2D Ex tb IIIC Db          |
| Test standard:              | IEC EN 60079-7               |
| IECEx certification:        | IECEx SEV 15.0018            |
| Further certifications:     | SEV 15 ATEX 0151             |
| Connectivity certification: | SEV 15 ATEX 0151             |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
| Maximum operating temperature: | 100 °C |

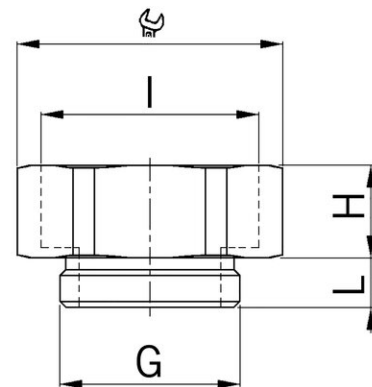

Assembly instructions



Certificates



Planning data