

## Product datasheet:

# Enlarging fittings nickel-plated brass increased safety Ex e II

## Outer thread metric or Pg

### Approval type: Erweiterung MS EX

- Outer thread Pg
- Inner thread metric
- with O-ring
- 2 = Certificate SEV 15 ATEX 0152X / IECEx SEV 15.0019X
- The norm interdicts to screw several reduction/enlarging fittings into each other!



**Article number:** **EX3600.29.40**

**EAN:** 7611614175164

**Packaging quantity:** 20

**Price group:** 530

### Dimensions / Form

**Product length:** 8 mm


**Spanner size:** 46 mm

**Dimension H:** 14.0 mm

**Dimension L:** 8 mm

**External thread:** Pg 29

**Internal thread:** M40x1.5

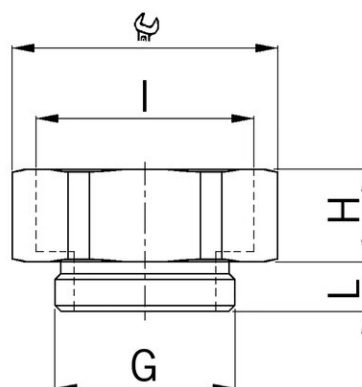

### Connections / Entries

**clamp technology:** Compression technology

### Features

**Product type:** expansion



### Approvals / Certifications

**Protection class:** IP66

**Explosion-proof design:** Yes

**EX zone:** Gas 1 and 2 - Dust 21 and 22

**Gas:** II 2G Ex eb IIC Gb

**Dust:** II 2D Ex tb IIIC Db

**Test standard:** IEC EN 60079-7

**IECEx certification:** IECEx SEV 15.0018

**Further certifications:** SEV 15 ATEX 0151

**Connectivity certification:** SEV 15 ATEX 0151



Assembly instructions



Certificates



Planning data

### Storage / Installation / Operation

**Minimum operating temperature:** -60 °C

## Product datasheet:

Maximum operating temperature: 100 °C

---