

## Product datasheet:

# Locking plugs nickel-plated brass increased safety Ex e II

## Short entry thread Pg

### Approval type: Verschlusszapfen MS EX

- with O-ring
- Long entry thread
- Executions in steel A2 and A4

|                        |                  |
|------------------------|------------------|
| <b>Article number:</b> | <b>EX8709.08</b> |
| EAN:                   | 7611614175737    |
| Packaging quantity:    | 50               |

### Dimensions / Form

|                  |       |
|------------------|-------|
| Product Ø:       | 17 mm |
| Thread:          | Pg 9  |
| Dimension H:     | 3 mm  |
| Thread length L: | 6 mm  |

### Connections / Entries

|                   |                        |
|-------------------|------------------------|
| clamp technology: | Compression technology |
|-------------------|------------------------|

### Features


|                |       |
|----------------|-------|
| Thread type:   | Pg    |
| Thread length: | short |

### Approvals / Certifications

|                             |                              |
|-----------------------------|------------------------------|
| Protection class:           | IP66                         |
| Explosion-proof design:     | Yes                          |
| EX zone:                    | Gas 1 and 2 - Dust 21 and 22 |
| Gas:                        | II 2G Ex eb IIC Gb           |
| Dust:                       | II 2D Ex tb IIIC Db          |
| Test standard:              | IEC EN 60079-7               |
| IECEx certification:        | IECEx SEV 15.0018            |
| Further certifications:     | SEV 15 ATEX 0151             |
| Connectivity certification: | SEV 15 ATEX 0151             |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
| Maximum operating temperature: | 100 °C |

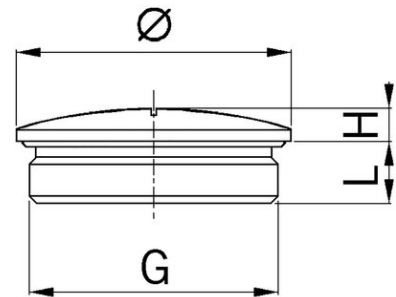

Assembly instructions



Certificates



Planning data