

## Product datasheet:

# Cable glands Progress® AgreenO EMC easyCONNECT nickel-plated brass lead-free with contact spring

## Short entry thread metric

### Approval type: Progress AgreenO EMV easyCONNECT

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Entry thread Pg and NPT



|                        |                        |
|------------------------|------------------------|
| <b>Article number:</b> | <b>➔ 1083.12.050LF</b> |
| E-No:                  | 121187108              |
| EAN:                   | 7611614347158          |
| Packaging quantity:    | 50                     |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M12x1.5 |
| Spanner size:    | 15 mm   |
| Dimension H:     | 22 mm   |
| Thread length L: | 5 mm    |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 3.5 mm                 |
| Max. clamping range: | 5 mm                   |
| clamp technology:    | Compression technology |
| Contact:             | Contact spring         |

### Safety / Properties


|                        |     |
|------------------------|-----|
| Lead-free:             | Yes |
| Shielded design (EMC): | Yes |

### Features

|                |                                                                                                        |
|----------------|--------------------------------------------------------------------------------------------------------|
| Properties:    | For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables |
| Thread type:   | metric                                                                                                 |
| Thread length: | short                                                                                                  |

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP69                  |
| Protection class with condition: | IP 68 (10 bar) / IP69 |
| VDE:                             | Yes                   |

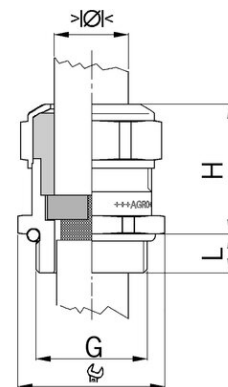

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
| Maximum operating temperature: | 100 °C |



Assembly instructions



Certificates



Planning data