

## Product datasheet:

# Cable glands Progress® AgreenO EMC easyCONNECT nickel-plated brass lead-free with contact spring

## Long entry thread metric

### Approval type: Progress AgreenO EMV easyCONNECT

- Two-piece sealing insert
- not overall length insulated
- 1 = One-piece sealing insert
- Entry thread Pg and NPT



|                     |               |
|---------------------|---------------|
| Article number:     | 1183.40LF     |
| E-No:               | 121186258     |
| EAN:                | 7611614347301 |
| Packaging quantity: | 10            |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M40x1.5 |
| Spanner size:    | 46 mm   |
| Dimension H:     | 38 mm   |
| Thread length L: | 13 mm   |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 28.5 mm                |
| Max. clamping range:            | 33 mm                  |
| Clamping range with inlet min.: | 24 mm                  |
| Clamping range with inlet max.: | 28.5 mm                |
| clamp technology:               | Compression technology |
| Contact:                        | Contact spring         |

### Safety / Properties


|                        |     |
|------------------------|-----|
| Lead-free:             | Yes |
| Shielded design (EMC): | Yes |

### Features

|              |                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------|
| Properties:  | For a quick and safe installation of partially dismantled cables as well as thoroughly shielded cables |
| Thread type: | metric                                                                                                 |

### Approvals / Certifications

|                                  |                       |
|----------------------------------|-----------------------|
| Protection class:                | IP69                  |
| Protection class with condition: | IP 68 (10 bar) / IP69 |
| VDE:                             | Yes                   |

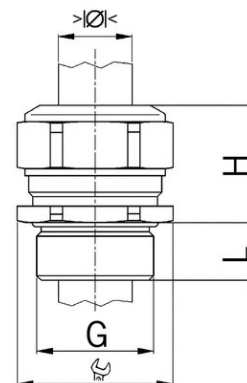

## Product datasheet:

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -60 °C |
| Maximum operating temperature: | 100 °C |



Assembly instructions



Certificates



Planning data