

Product datasheet:

Cable glands Progress® AgreenO EMC nickel-plated brass lead-free with contact sleeve

Short entry thread metric

- One-piece sealing insert
- not overall length insulated
- Entry thread Pg and NPT



Article number:	➔ 1080.63.460LF
EAN:	7611614347714
Packaging quantity:	5
Price group:	520

Dimensions / Form

Thread:	M63x1.5
Spanner size:	70 mm
Dimension H:	39 mm
Thread length L:	10 mm

Connections / Entries

Min. clamping range:	40 mm
Max. clamping range:	46 mm
clamp technology:	Compression technology
Contact:	Contact sleeve

Safety / Properties

Lead-free:	Yes
Shielded design (EMC):	Yes

Features


Properties:	Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
Thread type:	metric
Thread length:	short

Approvals / Certifications

Protection class:	IP69
Protection class with condition:	IP 68 (10 bar) / IP69
VDE:	Yes

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
--------------------------------	--------

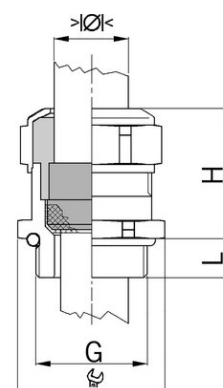

UK
CA



Assembly instructions



Planning data

Product datasheet:

Maximum operating temperature: 100 °C
