

Product datasheet:

Cable glands Progress® AgreenO EMC nickel-plated brass lead-free with contact sleeve

Long entry thread metric

- One-piece sealing insert
- not overall length insulated
- Entry thread Pg and NPT



Article number:	1180.20.140LF
EAN:	7611614347783
Packaging quantity:	50
Price group:	520

Dimensions / Form

Thread:	M20x1.5
Spanner size:	24 mm
Dimension H:	27 mm
Thread length L:	10 mm

Connections / Entries

Min. clamping range:	11 mm
Max. clamping range:	14 mm
clamp technology:	Compression technology
Contact:	Contact sleeve

Safety / Properties

Lead-free:	Yes
Shielded design (EMC):	Yes

Features


Properties:	Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
Thread type:	metric

Approvals / Certifications

Protection class:	IP69
Protection class with condition:	IP 68 (10 bar) / IP69
VDE:	Yes

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

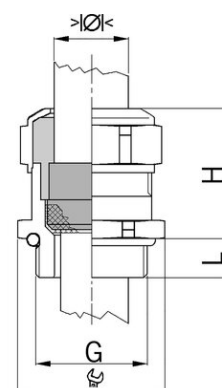

UK
CA



Assembly instructions



Planning data