

## Product datasheet:

# AGRO combination conduit glands Progress® nickel-plated brass with integrated cable gland

## Short entry thread Pg

### Approval type: Progress MS Kombi

- Connector for tubing with AD mm
- Two-piece sealing insert
- not overall length insulated
- Depending on the type of conduit, the stabilising bush must be ordered separately.
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



**Article number:** **1700.36.45**

**EAN:** 7611614144092

**Packaging quantity:** 10

### Dimensions / Form

|                  |          |
|------------------|----------|
| Thread:          | Pg 36    |
| Spanner size:    | 50/54 mm |
| Dimension H:     | 60 mm    |
| Thread length L: | 8 mm     |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 30.5 mm                |
| Max. clamping range:            | 35 mm                  |
| Clamping range with inlet min.: | 26 mm                  |
| Clamping range with inlet max.: | 30.5 mm                |
| clamp technology:               | Compression technology |

### Features


|                |       |
|----------------|-------|
| Thread type:   | Pg    |
| Thread length: | short |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
|-------------------|------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

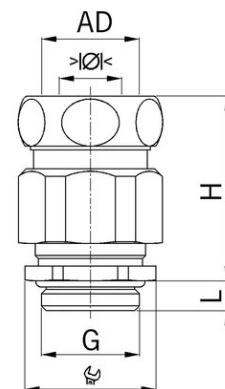

UK  
CA



Assembly instructions



Planning data