

## Product datasheet:

# AGRO Adapter Progress® nickel-plated brass with integrated cable gland

## Long entry thread metric

### Approval type: Progress MS Adapter

- Two-piece sealing insert
- overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                |
|------------------------|----------------|
| <b>Article number:</b> | <b>1165.40</b> |
| EAN:                   | 7611614141916  |
| Packaging quantity:    | 10             |
| Price group:           | 540            |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Spanner size:    | 46 mm   |
| Dimension H:     | 48 mm   |
| External thread: | M40x1.5 |
| Internal thread: | M40x1.5 |
| Thread length L: | 13 mm   |

### Connections / Entries

|                                 |                        |
|---------------------------------|------------------------|
| Min. clamping range:            | 28.5 mm                |
| Max. clamping range:            | 33 mm                  |
| Clamping range with inlet min.: | 24 mm                  |
| Clamping range with inlet max.: | 28.5 mm                |
| clamp technology:               | Compression technology |

### Features


|                |         |
|----------------|---------|
| Thread type:   | metric  |
| Thread length: | long    |
| Product type:  | Adapter |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
| VDE:              | Yes  |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

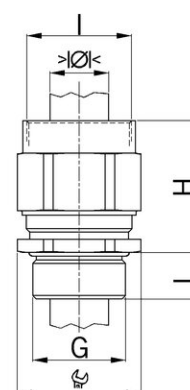

Assembly instructions



Certificates



Planning data