

## Product datasheet:

# AGRO combination conduit glands Progress® EMC nickel-plated brass with integrated cable gland

## Long entry thread metric

### Approval type: Progress MS Kombi EMC

- One-piece sealing insert
- not overall length insulated
- Depending on the type of conduit, the stabilising bush must be ordered separately.
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



|                        |                    |
|------------------------|--------------------|
| <b>Article number:</b> | ➔ 1710.80.20.140.2 |
| E-No:                  | 126638503          |
| EAN:                   | 7611614144740      |
| Packaging quantity:    | 25                 |

### Dimensions / Form

|                  |          |
|------------------|----------|
| Thread:          | M20x1.5  |
| Spanner size:    | 24/27 mm |
| Dimension H:     | 43 mm    |
| Thread length L: | 10 mm    |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 11 mm                  |
| Max. clamping range: | 14 mm                  |
| clamp technology:    | Compression technology |

### Safety / Properties

|                        |     |
|------------------------|-----|
| Shielded design (EMC): | Yes |
|------------------------|-----|

### Features


|                |                                                                                                                    |
|----------------|--------------------------------------------------------------------------------------------------------------------|
| Properties:    | Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland |
| Thread type:   | metric                                                                                                             |
| Thread length: | long                                                                                                               |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
| VDE:              | Yes  |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

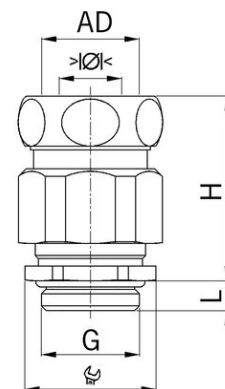

Assembly instructions



Certificates



Planning data