

Product datasheet:

AGRO Adapters Progress® nickel-plated brass with integrated EMC cable gland

Long entry thread metric

Approval type: Progress MS Kombi EMC

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **1165.80.12.060**

E-No: 126648310

EAN: 7611614141961

Packaging quantity: 50

Dimensions / Form

Spanner size:	15 mm
Dimension H:	34 mm
External thread:	M12x1.5
Internal thread:	M12x1.5
Thread length L:	10 mm

Connections / Entries

Min. clamping range:	4.5 mm
Max. clamping range:	6 mm
clamp technology:	Compression technology

Safety / Properties

Shielded design (EMC):	Yes
------------------------	-----

Features


Properties:	Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
-------------	--

Thread type:	metric
Thread length:	long
Product type:	Adapter

Approvals / Certifications

Protection class:	IP68
VDE:	Yes

Storage / Installation / Operation

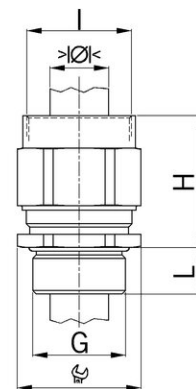

Assembly instructions



Certificates



Planning data

Product datasheet:

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C