

Product datasheet:

AGRO Adapters Progress® nickel-plated brass with integrated EMC cable gland

Long entry thread metric

Approval type: Progress MS Kombi EMC

- One-piece sealing insert
- not overall length insulated
- 1 = Metric coarse-pitch thread (with VDE Testreport)
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **1165.80.40.320**

E-No: 126648811

EAN: 7611614142364

Packaging quantity: 5

Dimensions / Form

Spanner size: 46 mm

Dimension H: 51 mm

External thread: M40x1.5

Internal thread: M40x1.5

Thread length L: 13 mm

Connections / Entries

Min. clamping range: 28.5 mm

Max. clamping range: 32 mm

clamp technology: Compression technology

Safety / Properties

Shielded design (EMC): Yes

Features

Properties: Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland

Thread type: metric

Thread length: long


Product type: Adapter

Approvals / Certifications

Protection class: IP68

VDE: Yes

Storage / Installation / Operation

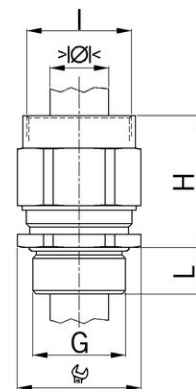

Assembly instructions



Certificates



Planning data

Product datasheet:

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C