

Product datasheet:

AGRO Adapters Progress® nickel-plated brass with integrated EMC cable gland

Long entry thread Pg

Approval type: Progress MS Kombi EMC

- One-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **1165.80.11.085**

EAN: 7611614142036

Packaging quantity: 50

Price group: 520

Dimensions / Form

Spanner size: 21 mm

Dimension H: 38 mm

External thread: Pg 11

Internal thread: Pg 11

Thread length L: 10 mm

Connections / Entries

Min. clamping range: 5.5 mm

Max. clamping range: 8.5 mm

clamp technology: Compression technology

Safety / Properties

Shielded design (EMC): Yes

Features

Properties: Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland

Thread type: Pg

Thread length: long

Product type: Adapter


Approvals / Certifications

Protection class: IP68

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 100 °C

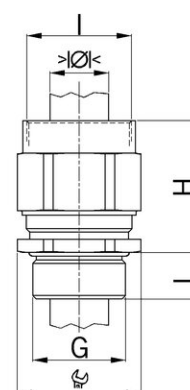

UK
CA



Assembly instructions



Planning data