

Product datasheet:

AGRO Adapters Progress® nickel-plated brass with integrated EMC cable gland

Long entry thread Pg

Approval type: Progress MS Kombi EMC

- One-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number:	1165.80.11.085
EAN:	7611614142036
Packaging quantity:	50

Dimensions / Form

Spanner size:	21 mm
Dimension H:	38 mm
External thread:	Pg 11
Internal thread:	Pg 11
Thread length L:	10 mm

Connections / Entries

Min. clamping range:	5.5 mm
Max. clamping range:	8.5 mm
clamp technology:	Compression technology

Safety / Properties

Shielded design (EMC):	Yes
------------------------	-----

Features


Properties:	Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
Thread type:	Pg
Thread length:	long
Product type:	Adapter

Approvals / Certifications

Protection class:	IP68
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

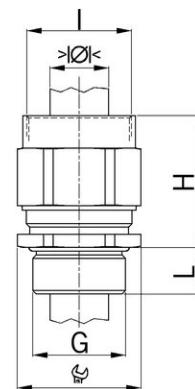

UK
CA



Assembly instructions



Planning data