

Product datasheet:

AGRO Adapters Progress® nickel-plated brass with integrated EMC cable gland

Long entry thread Pg

Approval type: Progress MS Kombi EMC

- One-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



Article number: **1165.80.36.305**

EAN: 7611614142128

Packaging quantity: 10

Dimensions / Form

Spanner size:	50 mm
Dimension H:	54 mm
External thread:	Pg 36
Internal thread:	Pg 36
Thread length L:	15 mm

Connections / Entries

Min. clamping range:	25 mm
Max. clamping range:	30.5 mm
clamp technology:	Compression technology

Safety / Properties

Shielded design (EMC):	Yes
------------------------	-----

Features


Properties:	Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland
Thread type:	Pg
Thread length:	long
Product type:	Adapter

Approvals / Certifications

Protection class:	IP68
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	100 °C

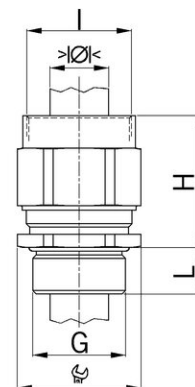

**UK
CA**



Assembly instructions



Planning data