

## Product datasheet:

# AGRO Adapters Progress® nickel-plated brass with integrated EMC cable gland

## Long entry thread Pg

### Approval type: Progress MS Kombi EMC

- One-piece sealing insert
- not overall length insulated
- Available with sealing inserts conformity with EN 45545 / NFPA 130. When placing an inquiry, prefix the article number by the capital F.



**Article number:** **1165.80.36.350**

**EAN:** 7611614142135

**Packaging quantity:** 10

### Dimensions / Form

|                  |       |
|------------------|-------|
| Spanner size:    | 50 mm |
| Dimension H:     | 54 mm |
| External thread: | Pg 36 |
| Internal thread: | Pg 36 |
| Thread length L: | 15 mm |

### Connections / Entries

|                      |                        |
|----------------------|------------------------|
| Min. clamping range: | 30.5 mm                |
| Max. clamping range: | 35 mm                  |
| clamp technology:    | Compression technology |

### Safety / Properties

|                        |     |
|------------------------|-----|
| Shielded design (EMC): | Yes |
|------------------------|-----|

### Features


|                |                                                                                                                    |
|----------------|--------------------------------------------------------------------------------------------------------------------|
| Properties:    | Excellent shield contact through the contact sleeve with the braided shield terminating in the screwed cable gland |
| Thread type:   | Pg                                                                                                                 |
| Thread length: | long                                                                                                               |
| Product type:  | Adapter                                                                                                            |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
|-------------------|------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

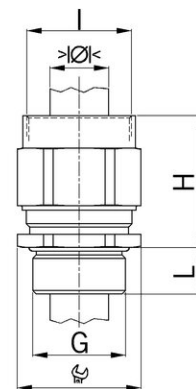

**UK  
CA**



Assembly instructions



Planning data