

## Product datasheet:

# Cable glands Syntec® nickel-plated brass with lamellar technology

## Short entry thread metric

### Approval type: SYNTEC MS

- One-piece sealing ring
- not overall length insulated
- Entry thread Pg



|                        |                    |
|------------------------|--------------------|
| <b>Article number:</b> | <b>1045.40.280</b> |
| E-No:                  | 121224518          |
| EAN:                   | 7611614230054      |
| Packaging quantity:    | 10                 |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M40x1.5 |
| Spanner size:    | 46 mm   |
| Dimension H:     | 40 mm   |
| Thread length L: | 8 mm    |

### Connections / Entries

|                      |                    |
|----------------------|--------------------|
| Min. clamping range: | 19 mm              |
| Max. clamping range: | 28 mm              |
| Clamping range UL:   | 23 - 28 mm         |
| clamp technology:    | Lamella technology |

### Features


|                |        |
|----------------|--------|
| Thread type:   | metric |
| Thread length: | short  |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
| VDE:              | Yes  |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 100 °C |

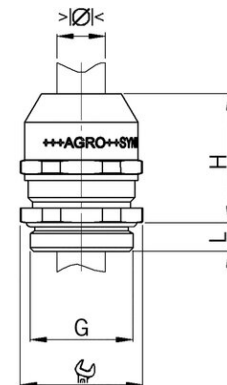

Assembly instructions



Certificates



Planning data