




Teilbare Kabelverschraubungen

Splittable cable glands / Presse-étoupe divisible /


Pressacavi divisibile

1925.OSF.63 / 1925.OSF.50 / 1925.OSF.40 / 1925.OSF.32 /
1925.OSF.25 / 1925.OSF.20 / 1925.OSF.16

Montageanleitung / Installation instructions /
Instructions de montage / Istruzioni per il montaggio

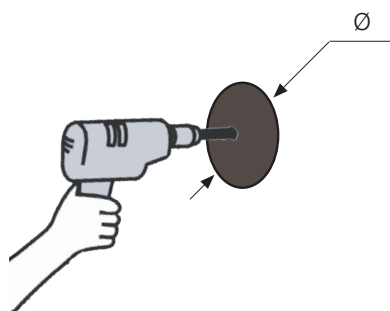

	Ø ±0.5mm	Max. insert size		
		1929.SPC 1x	1929.SPC 2x	1929.SPC 4x
1925.OSF.63	63.5	1929.SPC.14	1929.SPC.2x7	1929.SPC.4x6
1925.OSF.50	50.5	1929.SPC.14	1929.SPC.2x7	1929.SPC.4x6
1925.OSF.40	40.5	1929.SPC.14	1929.SPC.2x7	1929.SPC.4x6
1925.OSF.32	32.5	1929.SPC.14	1929.SPC.2x7	1929.SPC.4x6
1925.OSF.25	25.5	1929.SPC.14	1929.SPC.2x7	1929.SPC.4x6
1925.OSF.20	20.5	1929.SPC.14	1929.SPC.2x5	1929.SPC.4x5
1925.OSF.16	16.5	1929.SPC.10	1929.SPC.2x4	1929.SPC.4x4

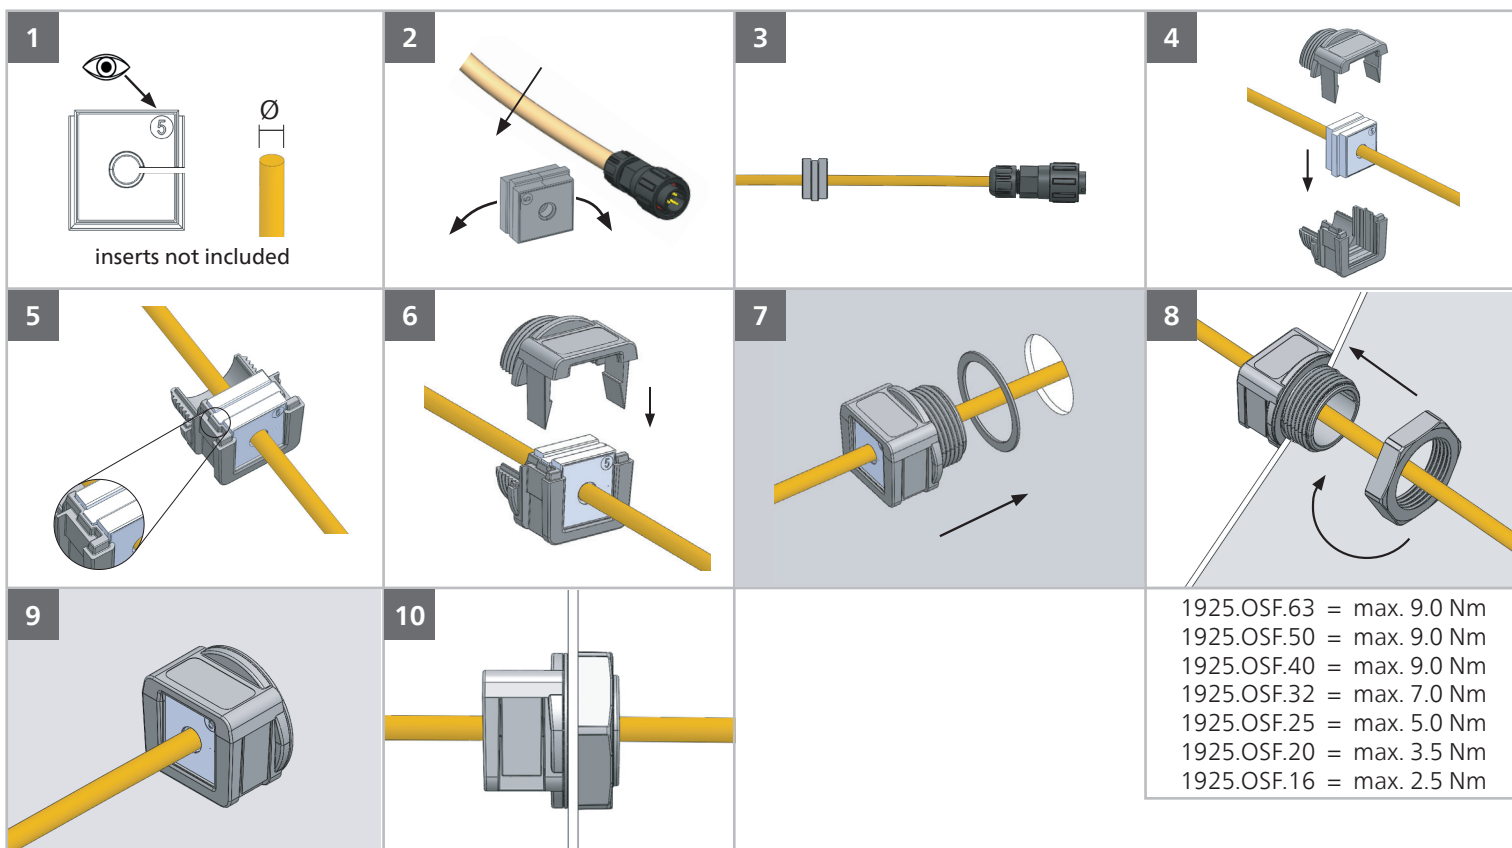

1925.OSF.63 = max. 9.0 Nm
1925.OSF.50 = max. 9.0 Nm
1925.OSF.40 = max. 9.0 Nm
1925.OSF.32 = max. 7.0 Nm
1925.OSF.25 = max. 5.0 Nm
1925.OSF.20 = max. 3.5 Nm
1925.OSF.16 = max. 2.5 Nm