

## Product datasheet:

# Synthetic cable glands Syntec® with lamellar technology

## Long entry thread metric

### Approval type: SYNTEC

- Light grey RAL 7035
- One-piece sealing ring
- Dark grey RAL 7001



|                        |                     |
|------------------------|---------------------|
| <b>Article number:</b> | <b>1555.17.1.10</b> |
| E-No:                  | 121762518           |
| EAN:                   | 7611614230566       |
| Packaging quantity:    | 50                  |

### Dimensions / Form

|                  |         |
|------------------|---------|
| Thread:          | M16x1.5 |
| Spanner size:    | 19 mm   |
| Dimension H:     | 25 mm   |
| Thread length L: | 15 mm   |

### Connections / Entries

|                      |                    |
|----------------------|--------------------|
| Min. clamping range: | 5 mm               |
| Max. clamping range: | 10 mm              |
| Clamping range UL:   | 5.7 - 10 mm        |
| clamp technology:    | Lamella technology |

### Features


|                |                                                                      |
|----------------|----------------------------------------------------------------------|
| Properties:    | halogen-free, black UV resistant (tested according to EN ISO 4892-2) |
| Thread type:   | metric                                                               |
| Thread length: | long                                                                 |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP68 |
| VDE:              | Yes  |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -30 °C |
| Maximum operating temperature: | 100 °C |

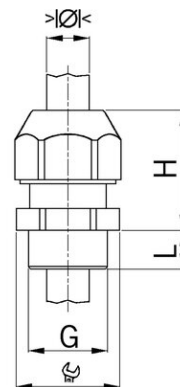

Assembly instructions



Certificates



Planning data