

## Product datasheet:

# Synthetic cable glands Syntec® with lamellar technology

## Entry thread NPT

### Approval type: SYNTEC

- Light grey RAL 7035
- One-piece sealing ring



|                        |                      |
|------------------------|----------------------|
| <b>Article number:</b> | <b>1555.N1000.22</b> |
| E-No:                  | 121758619            |
| EAN:                   | 7611614078090        |
| Packaging quantity:    | 20                   |

### Dimensions / Form

|                  |        |
|------------------|--------|
| Thread:          | NPT 1" |
| Spanner size:    | 42 mm  |
| Dimension H:     | 36 mm  |
| Thread length L: | 15 mm  |

### Connections / Entries

|                      |                    |
|----------------------|--------------------|
| Min. clamping range: | 17 mm              |
| Max. clamping range: | 22 mm              |
| Clamping range UL:   | 19.5 - 22 mm       |
| clamp technology:    | Lamella technology |

### Features


|              |                                                                      |
|--------------|----------------------------------------------------------------------|
| Properties:  | halogen-free, black UV resistant (tested according to EN ISO 4892-2) |
| Thread type: | NPT                                                                  |

### Approvals / Certifications

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Protection class:                | IP54                                  |
| Protection class with condition: | IP68 (if connection thread is sealed) |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -30 °C |
| Maximum operating temperature: | 100 °C |

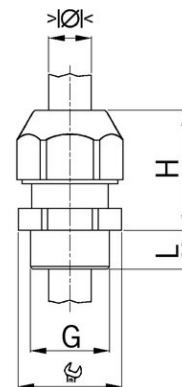

Assembly instructions