

Product datasheet:

Synthetic protective EMC conduit liquid-tight

Metal protective EMC conduits liquid-tight

- Synthetic protective EMC conduit liquid-tight
- For EMC applications brass thrust collar necessary!



Article number:	↻ 4230.101.028
E-No:	125532699
EAN:	7611614202419
Packaging quantity:	25

Features


Properties:	Very flexible, airtight and liquid-proof, resistant to stretch and twist, widely resistant to oil and acids, free of silicone and cadmium, high internal resistance to compression, protection against hot swarf, good shielding properties, inside protection
-------------	--

Approvals / Certifications

Protection class:	IP68
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-25 °C
Maximum operating temperature:	90 °C

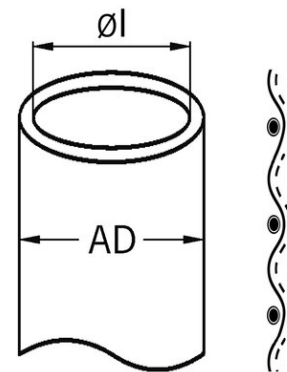

**UK
CA**