

Product datasheet:

Facade feed through pluggable synthetic

For facade and window systems

- Syntec® facade lead-through with push-in connection
- Black



Article number:	1545.99.08
E-No:	121670108
EAN:	7611614443447
Packaging quantity:	50

Dimensions / Form

Installation opening (wall/ceiling) Ø:	27.5 mm
Spanner size:	27/24 mm
Ø B:	27.0 mm
Drill hole Ø:	27.5 mm
Dimension H:	30 mm
Thread length L:	33 mm

Connections / Entries

Min. clamping range:	3.5 mm
Max. clamping range:	8 mm

Safety / Properties

Halogen-free:	Yes
---------------	-----

Features


Properties:	halogen-free, black UV resistant (tested according to EN ISO 4892-2)
-------------	--

Approvals / Certifications

Protection class:	IP66
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-30 °C
Maximum operating temperature:	100 °C

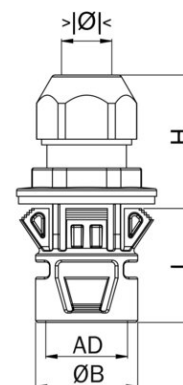

Assembly instructions



Planning data