

## Product datasheet:

# Synthetic conduit connector elbow 90° with flange

## Synthetic conduit connector elbow 90°

- Quick connector RQW-F
- Black



|                        |                     |
|------------------------|---------------------|
| <b>Article number:</b> | <b>5020.077.248</b> |
| E-No:                  | 126829910           |
| EAN:                   | 7611614202068       |
| Packaging quantity:    | 10                  |

### Dimensions / Form

|                      |        |
|----------------------|--------|
| Product Ø:           | 76 mm  |
| Ø A:                 | 50 mm  |
| Ø G:                 | 6.6 mm |
| Dimension B:         | 86 mm  |
| Measurement value C: | 71 mm  |
| Measurement value E: | 30 mm  |
| Measurement value F: | 121 mm |
| Dimension H:         | 64 mm  |

### Features


|             |                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------|
| Properties: | Quick and pull-out-proof installation by means of the «push-in» lock, simple dismounting by displacing the snap-in sleeve |
|-------------|---------------------------------------------------------------------------------------------------------------------------|

### Approvals / Certifications

|                   |            |
|-------------------|------------|
| Protection class: | IP69       |
| Fire class:       | V0 (UL 94) |

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 120 °C |

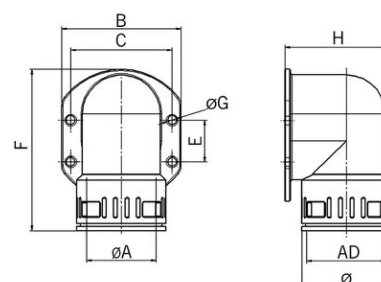

UK  
CA