

Product datasheet:

Complete conduit gland nickel-plated brass

Complete conduit gland nickel-plated brass

- Conduit gland US-M
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number: **5010.328.010**

E-No: 126464250

EAN: 7611614118703

Packaging quantity: 50

Dimensions / Form

Thread: M10x1.0

Spanner size: 15/17 mm

Ø B: 19 mm

Ø I: 6.0 mm

Measurement value C: 10 mm

Measurement value D: 31 mm

Features

Properties: Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations

Thread type: metric


Approvals / Certifications

Protection class: IP67

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 125 °C

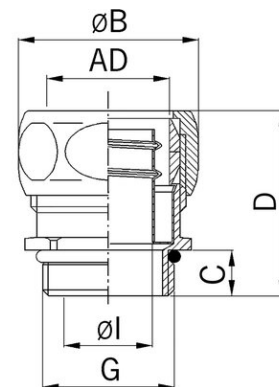

UK
CA