

Product datasheet:

Complete conduit gland nickel-plated brass

Complete conduit gland nickel-plated brass

- Conduit gland US-M
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number:	5010.328.012
E-No:	126464350
EAN:	7611614118710
Packaging quantity:	50

Dimensions / Form

Thread:	M12x1.5
Spanner size:	19/21 mm
Ø B:	23 mm
Ø I:	8.5 mm
Measurement value C:	10 mm
Measurement value D:	33 mm

Features


Properties:	Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations
Thread type:	metric

Approvals / Certifications

Protection class:	IP67
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	125 °C

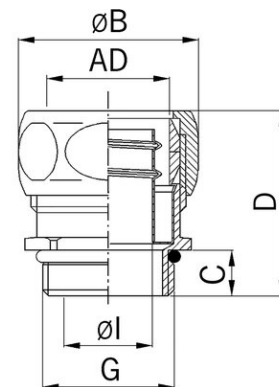

UK
CA