

## Product datasheet:

# Complete conduit gland nickel-plated brass

## Complete conduit gland nickel-plated brass

- Conduit gland US-M
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



|                        |                     |
|------------------------|---------------------|
| <b>Article number:</b> | <b>5010.328.020</b> |
| E-No:                  | 126464550           |
| EAN:                   | 7611614118116       |
| Packaging quantity:    | 50                  |

### Dimensions / Form

|                      |          |
|----------------------|----------|
| Thread:              | M20x1.5  |
| Spanner size:        | 27/29 mm |
| Ø B:                 | 31 mm    |
| Ø I:                 | 15.5 mm  |
| Measurement value C: | 10 mm    |
| Measurement value D: | 33 mm    |

### Features


|              |                                                                                                                                   |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Properties:  | Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations |
| Thread type: | metric                                                                                                                            |

### Approvals / Certifications

|                   |      |
|-------------------|------|
| Protection class: | IP67 |
|-------------------|------|

### Storage / Installation / Operation

|                                |        |
|--------------------------------|--------|
| Minimum operating temperature: | -40 °C |
| Maximum operating temperature: | 125 °C |

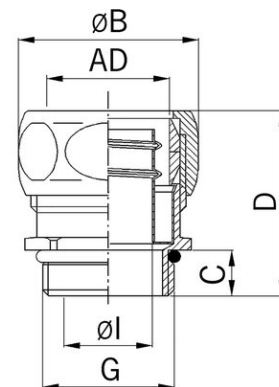

UK  
CA