

Product datasheet:

Complete conduit gland nickel-plated brass

Complete conduit gland nickel-plated brass

- Conduit gland US-M
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number: **5010.328.032**

E-No: 126464750

EAN: 7611614118130

Packaging quantity: 25

Dimensions / Form

Thread: M32x1.5

Spanner size: 43/45 mm

Ø B: 48 mm

Ø I: 27.5 mm

Measurement value C: 13 mm

Measurement value D: 43 mm

Features

Properties: Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations

Thread type: metric


Approvals / Certifications

Protection class: IP67

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 125 °C

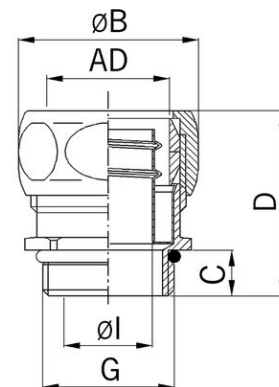

**UK
CA**