

Product datasheet:

Complete conduit gland nickel-plated brass

Complete conduit gland nickel-plated brass

- Conduit gland US-M
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number:	5010.328.040
E-No:	126464850
EAN:	7611614118147
Packaging quantity:	20

Dimensions / Form

Thread:	M40x1.5
Spanner size:	52/54 mm
Ø B:	57 mm
Ø I:	35.0 mm
Measurement value C:	13 mm
Measurement value D:	43 mm

Features


Properties:	Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations
Thread type:	metric

Approvals / Certifications

Protection class:	IP67
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	125 °C

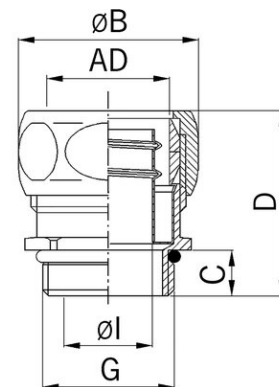

UK
CA