

Product datasheet:

Complete conduit gland nickel-plated brass

Complete conduit gland nickel-plated brass

- Conduit gland US-P
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number:	5010.128.029
EAN:	7611614118680
Packaging quantity:	25

Dimensions / Form

Thread:	Pg 29
Spanner size:	43/45 mm
Ø B:	48 mm
Ø I:	27.5 mm
Measurement value C:	10 mm
Measurement value D:	40 mm

Features

Properties:	Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations
-------------	---


Thread type:	Pg
--------------	----

Approvals / Certifications

Protection class:	IP67
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	125 °C

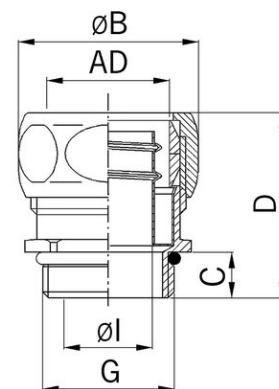

UK
CA