

Product datasheet:

Complete conduit gland nickel-plated brass

Complete conduit gland nickel-plated brass

- Conduit gland US-P
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number: **5010.128.036**

EAN: 7611614110189

Packaging quantity: 20

Dimensions / Form

Thread:	Pg 36
Spanner size:	52/54 mm
Ø B:	57 mm
Ø I:	36.5 mm
Measurement value C:	10 mm
Measurement value D:	40 mm

Features

Properties: Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations

Thread type: Pg


Approvals / Certifications

Protection class: IP67

Storage / Installation / Operation

Minimum operating temperature: -40 °C

Maximum operating temperature: 125 °C

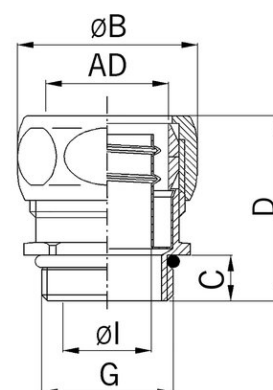

**UK
CA**