

Product datasheet:

Complete conduit gland nickel-plated brass

Complete conduit gland nickel-plated brass

- Conduit gland US-P
- SPR-PVC-AS, SPR-PU-AS / FLEXAgraff-PU-AS
- 1 = For FLEXAgraff-PU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



Article number:	5010.140.021
EAN:	7611614119151
Packaging quantity:	25

Dimensions / Form

Thread:	Pg 21
Spanner size:	34/36 mm
Ø B:	39 mm
Ø I:	20.5 mm
Measurement value C:	10 mm
Measurement value D:	40 mm

Connections / Entries

Number of entries:	1
--------------------	---

Features


Properties:	Highly watertight and dustproof, friction locking of conduit and gland, covered conduit ends, resistant to stretch and vibrations
Thread type:	Pg

Approvals / Certifications

Protection class:	IP67
-------------------	------

Storage / Installation / Operation

Minimum operating temperature:	-40 °C
Maximum operating temperature:	125 °C

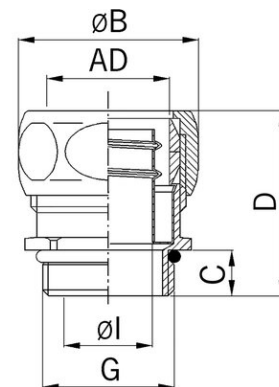

UK
CA