

## Product datasheet:

# Complete EMC conduit connectors nickel-plated brass

## EMC conduit gland for metal conduit SPR / FLEXAgraff

- Conduit gland US-M
- for FLEXAgraff-CU-AS / SPR-EDU-AS
- with brass thrust collar
- 1 = For SPR-EDU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



**Article number:** **5011.327.012**

**EAN:** 7611614119083

**Packaging quantity:** 50

### Dimensions / Form

|                      |          |
|----------------------|----------|
| Thread:              | M12x1.5  |
| Spanner size:        | 19/21 mm |
| Ø B:                 | 23 mm    |
| Ø I:                 | 9.0 mm   |
| Measurement value C: | 10 mm    |
| Measurement value D: | 33 mm    |

### Features

**Properties:** Highly watertight and dustproof, friction locking of conduit and gland, proper earthing, covered conduit ends, resistant to stretch and vibrations

**Thread type:** metric


### Approvals / Certifications

**Protection class:** IP40

### Storage / Installation / Operation

**Minimum operating temperature:** -40 °C

**Maximum operating temperature:** 250 °C

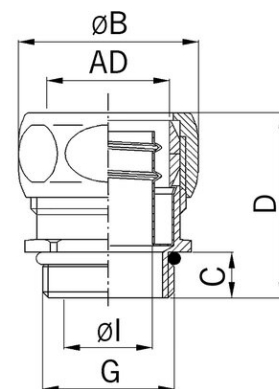

**UK  
CA**