

## Product datasheet:

# Complete EMC conduit connectors nickel-plated brass

## EMC conduit gland for metal conduit SPR / FLEXAgraff

- Conduit gland US-M
- for FLEXAgraff-CU-AS / SPR-EDU-AS
- with brass thrust collar
- 1 = For SPR-EDU-AS
- The reliability is only guaranteed with the corresponding stabilizing bush



**Article number:**  **5011.328.020**

**EAN:** 7611614119106

**Packaging quantity:** 50

### Dimensions / Form

**Thread:** M20x1.5

**Spanner size:** 27/29 mm

**Ø B:** 31 mm

**Ø I:** 16.0 mm

**Measurement value C:** 10 mm

**Measurement value D:** 33 mm

### Features

**Properties:** Highly watertight and dustproof, friction locking of conduit and gland, proper earthing, covered conduit ends, resistant to stretch and vibrations

**Thread type:** metric


### Approvals / Certifications

**Protection class:** IP40

### Storage / Installation / Operation

**Minimum operating temperature:** -40 °C

**Maximum operating temperature:** 250 °C

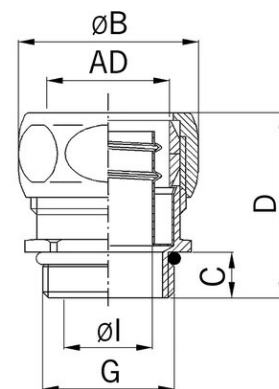

**UK  
CA**